2N5038* 2N5039


NPN Silicon Transistors

*Motorola Preferred Device

. . . fast switching speeds and high current capacity ideally suit these parts for use in switching regulators, inverters, wide–band amplifiers and power oscillators in industrial and commercial applications.

- High Speed — t_f = 0.5 μs (Max)
- High Current — $I_{C(max)}$ = 30 Amps
- Low Saturation — $V_{CE(sat)}$ = 2.5 V (Max) @ I_C = 20 Amps

20 AMPERE NPN SILICON POWER TRANSISTORS 75 and 90 VOLTS 140 WATTS



CASE 1–07 TO–204AA (TO–3)

***MAXIMUM RATINGS**

Rating	Symbol	2N5038	2N5039	Unit
Collector–Base Voltage	V_{CBO}	150	120	Vdc
Collector–Emitter Voltage	V_{CEV}	150	120	Vdc
Emitter–Base Voltage	V_{EBO}	7		Vdc
Collector Current — Continuous Peak (1)	I_C I_{CM}	20 30		Adc
Base Current — Continuous	I_B	5		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	140 0.8		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W

* Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 10 ms, Duty Cycle ≤ 50%.

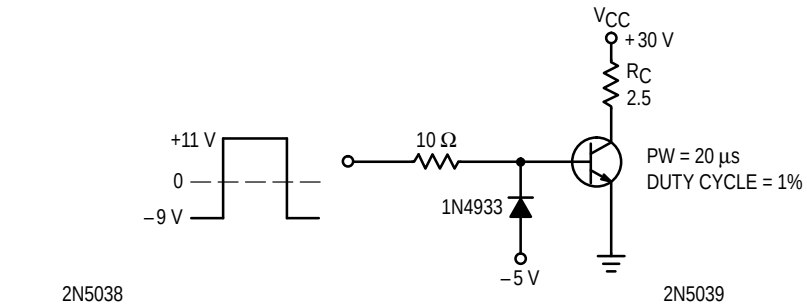


Figure 1. Switching Time Test Circuit

Preferred devices are Motorola recommended choices for future use and best overall value.

REV 7

© Motorola, Inc. 1995

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N5038		90	—	
	2N5039		75	—	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 V)	2N5038		—	50	
(V_{CE} = 110 Vdc, $V_{BE(off)}$ = 1.5 V)	2N5039		—	50	
(V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5038		—	10	
(V_{CE} = 85 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5039		—	10	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{EB} = 5 Vdc, I_C = 0)	2N5038		—	5	
	2N5039		—	15	
(V_{EB} = 7 Vdc, I_C = 0)	Both		—	50	
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			—
(I_C = 12 Adc, V_{CE} = 5 Vdc)	2N5038		20	100	
(I_C = 10 Adc, V_{CE} = 5 Vdc)	2N5039		20	100	
Collector–Emitter Saturation Voltage (I_C = 20 Adc, I_B = 5 Adc)		$V_{CE(sat)}$	—	2.5	Vdc
Base–Emitter Saturation Voltage (I_C = 20 Adc, I_B = 5 Adc)		$V_{BE(sat)}$	—	3.3	Vdc
DYNAMIC CHARACTERISTICS					
Magnitude of Common–Emitter Small–Signal Short–Circuit Forward Current Transfer Ratio (I_C = 2 Adc, V_{CE} = 10 Vdc, f = 5 MHz)		$\|h_{fe}\|$	12	—	—
SWITCHING CHARACTERISTICS					
RESISTIVE LOAD					
Rise Time	(V_{CC} = 30 Vdc)	t_r	—	0.5	μs
Storage Time	(I_C = 12 Adc, I_{B1} = I_{B2} = 1.2 Adc) 2N5038	t_s	—	1.5	μs
Fall Time	(I_C = 10 Adc, I_{B1} = I_{B2} = 1 Adc) 2N5039	t_f	—	0.5	μs

* Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 300, μs, Duty Cycle ≤ 2%.


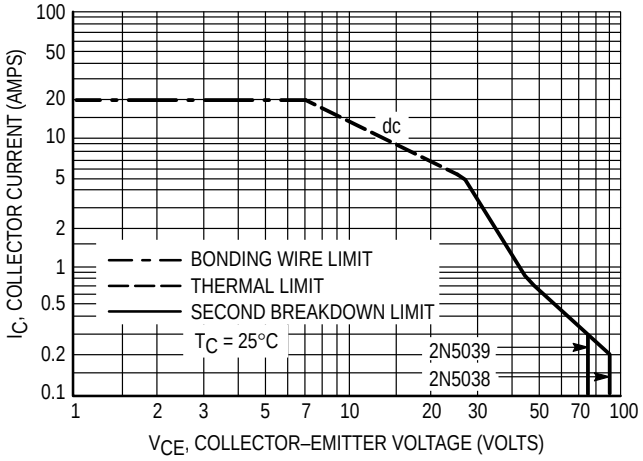


Figure 2. Forward Bias Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

Second breakdown pulse limits are valid for duty cycles to 10%. At high case temperatures, thermal limitations may reduce the power that can be handled to values less than the limitations imposed by second breakdown.

PACKAGE DIMENSIONS

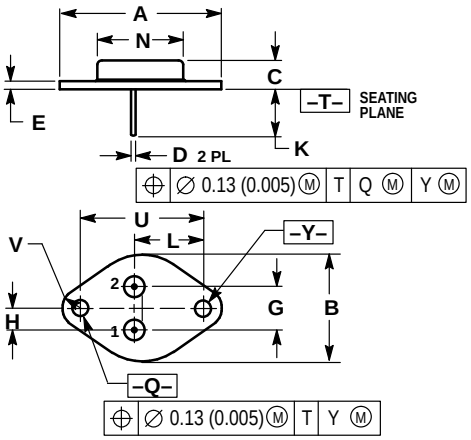

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO–204AA OUTLINE SHALL APPLY.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	1.550 REF		39.37 REF	
B	—	1.050	—	26.67
C	0.250	0.335	6.35	8.51
D	0.038	0.043	0.97	1.09
E	0.055	0.070	1.40	1.77
G	0.430 BSC		10.92 BSC	
H	0.215 BSC		5.46 BSC	
K	0.440	0.480	11.18	12.19
L	0.665 BSC		16.89 BSC	
N	—	0.830	—	21.08
Q	0.151	0.165	3.84	4.19
U	1.187 BSC		30.15 BSC	
V	0.131	0.188	3.33	4.77

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

CASE 1–07
TO–204AA (TO–3)
ISSUE Z

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters can and do vary in different applications. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:
USA / EUROPE: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244–6609
INTERNET: http://Design–NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, Toshikatsu Otsuki,
6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–3521–8315

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298